

HOLSAG CANADA

Seating Manufacturer

Specifications: Kristi Chair

Description:

The Kristi chair is a brilliantly designed chair, which offers a modern touch built for both comfort and durability. The saddle seat design and curved back creates the perfect sitting position, ensuring supreme comfort. The solid construction of this impressive piece provides its strength and stability, for long lasting endurance.

Dimensions: Chair

Overall Height	32.00"	81.28 cm
Overall Depth	18.75"	47.63 cm
Seat Height	18.00"	45.72 cm
Seat Depth	16.25"	41.23 cm
Seat Width	17.75"	45.09 cm
Chair Weight	18 lbs	8.2 kg
Carton Weight		
with 1 chair	28 lbs	12.7 kg
with 2 chairs	46 lbs	20.9 kg
Carton Size for 1 Chair		
	19.5" x 22" x 37.5"	
	49.5 cm x 56 cm x 95.25 cm	
Carton Volume for 1 Chair		
	9.3 cubic feet	
<i>Note: Carton is based on the shipping method. Carton Sizes based on courier shipping – for truck carton sizes please contact.</i>		

Fabric for upholstered seats:

COM (Customer's Own Material)
fabric required: .36 yard (.33 m) per chair

Note: Fabric amount is estimated on 54" (137 cm) wide material. The actual amount required may vary depending on special pattern matching and the width of the material.

Cushion Foam: High density foam on seat

Wood:

Species: 100% Solid European Beech Hardwood

Construction:


The chair is assembled with metal to metal hardware coated with Loctite.

Stain Colours:

A wide range of standard stain colours is available as well as custom colour matching. (A surcharge will apply to custom colours.)

9-Step Finishing Process:

1. The bare wood of the assembled product is thoroughly sanded using 100 grit paper.
2. One coat of stain is sprayed onto the entire product.
3. The stain is hand wiped to ensure an even colour and maximum penetration into the wood.
4. The product is inspected and any necessary adjustments made.
5. One coat of catalyzed sealer is sprayed onto all wood parts to completely seal the wood.
6. Once dry, the sealer is sanded using 280 grit paper.
7. A final sanding is done using Scotch Brite pads to remove any sanding marks.
8. A catalyzed lacquer is sprayed on. This lacquer is very durable and will stand up in a commercial environment.
9. A final inspection is performed prior to packaging to ensure a high level of quality control.

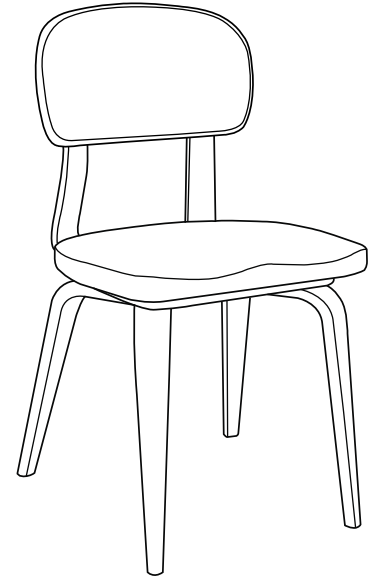

Note: Specifications are subject to change without notice.



Holsag Canada

164 Needham Street
Lindsay, Ontario Canada
K9V 5R7
(705) 878-1970
(888) 745-0721 (U.S. & Canada)
Fax: (705) 878-1864

www.holsag.com